

## **SHOWFOU ELECTRIC MACHINE CO., LTD.**

No. 66, Bengong Road, Gangshan District,  
Kaohsiung City 82059, Taiwan  
Tel No.: (07) 6226590  
Fax No.: +886-7-6226593  
e-mail:showfou@ms11. hinet. net  
<http://www.showfoupump.com>.




To create a  
world-class quality



GB-250




GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

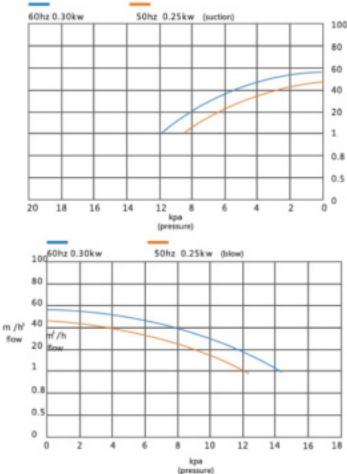

GB-370



GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)


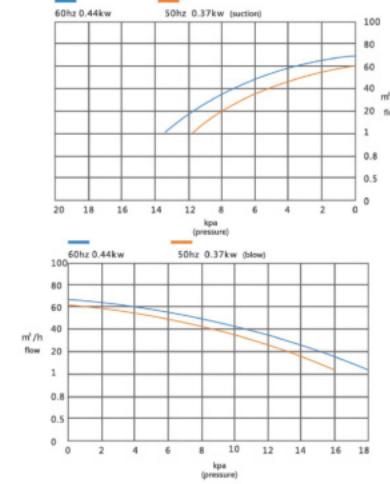


Type	Voltage V	Current A	Frequency Hz	Max pressure KPa	Max flow m³/h	Max Vacuum KPa	Power kw	Rotational Speed r/min	Noise dB(A)	N.W. kg	G.W. kg	Packing Size (cm)
GB-250	220	2.5(3.0)	50(60)	12(14)	48(57)	8.5(10)	0.25(0.30)	2800(3400)	<56	10.6	11.2	31×28×28
GB-250S	△220 Y380	1.24(1.68) 0.72(0.97)	50(60)	12(14)	48(57)	8.5(10)	0.25(0.30)	2800(3400)	<56	10	10.5	31×28×28
GB-370	220	3.5(4.2)	50(60)	16(19)	60(70)	11(13)	0.37(0.44)	2800(3400)	<56	11	11.7	31×28×28
GB-370S	△220 Y380	1.55(2.11) 1.05(1.16)	50(60)	16(19)	60(70)	11(13)	0.37(0.44)	2800(3400)	<56	10.6	11.2	31×28×28

## GB-550





GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

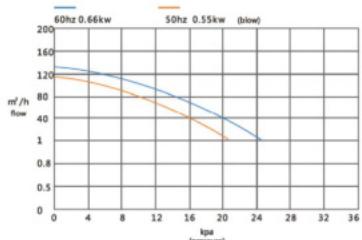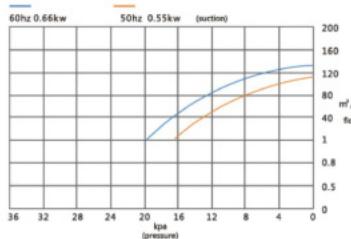

## GB-750





GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

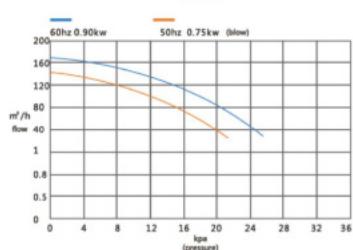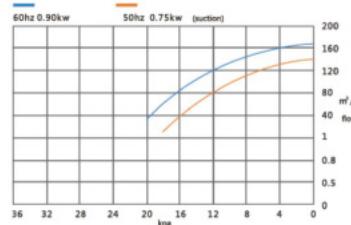

## GB-1100





GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

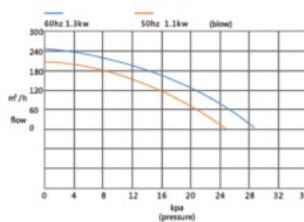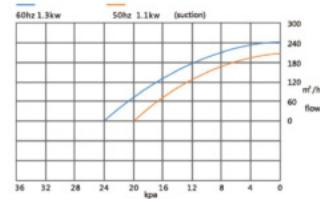

## GB-1500



GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

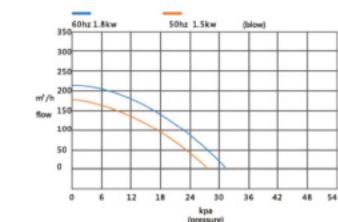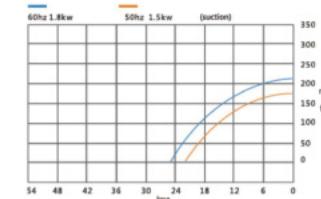


Type	Voltage V	Current A	Frequency Hz	Max Pressure KPa	Max flow m³/h	Max Vacuum KPa	Power kw	Rotational Speed r/min	Noise dB(A)	N.W. kg	G.W. kg	Packing Size (cm)
GB-550	220	4.8(5.76)	50(60)	20(24)	110(132)	16(19)	0.55(0.66)	2800(3400)	<60	12.6	14.1	32×31×30
GB-550S	△220 Y380	2.51(3.01) 1.45(1.74)	50(60)	20(24)	110(132)	16(19)	0.55(0.66)	2800(3400)	<60	12	13.5	32×31×30
GB-750	220	6.3(7.56)	50(60)	22(25)	145(170)	18(20)	0.75(0.90)	2800(3400)	<60	16.5	18.0	35×32×33
GB-750S	△220 Y380	3.31(4.10) 1.81(2.37)	50(60)	22(25)	145(170)	18(20)	0.75(0.90)	2800(3400)	<60	16.0	17.5	35×32×33

Type	Voltage V	Current A	Frequency Hz	Max Pressure KPa	Max flow m³/h	Max Vacuum KPa	Power kw	Rotational Speed r/min	Noise dB(A)	N.W. kg	G.W. kg	Packing Size (cm)
GB-1100	220	8.7(10.44)	50(60)	25(30)	210(245)	20(24)	1.1(1.3)	2800(3400)	<60	23	24.7	37×37×38
GB-1100S	△220 Y380	4.36(5.88) 2.52(3.42)	50(60)	25(30)	210(245)	20(24)	1.1(1.3)	2800(3400)	<60	21.5	22.9	37×37×38
GB-1500	220	11.8(14.16)	50(60)	26(31)	220(255)	21(25)	1.5(1.8)	2800(3400)	<60	23.4	28	37×37×38
GB-1500S	△220 Y380	5.96(8.20) 3.44(4.74)	50(60)	26(31)	220(255)	21(25)	1.5(1.8)	2800(3400)	<60	22.5	26	37×37×38

## GB-2200




GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

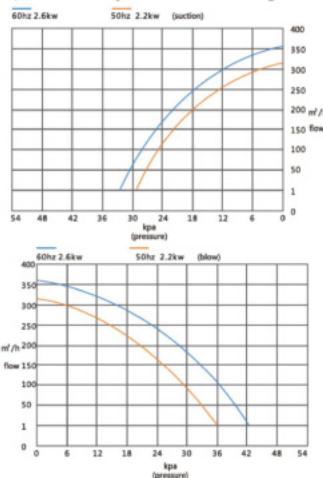

## GB-3000




GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

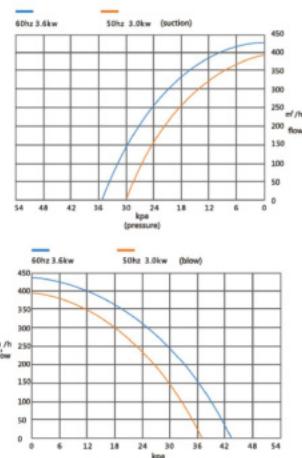

## GB-4000




GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

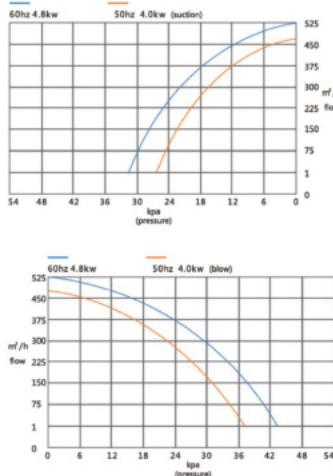

## GB-5500



GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

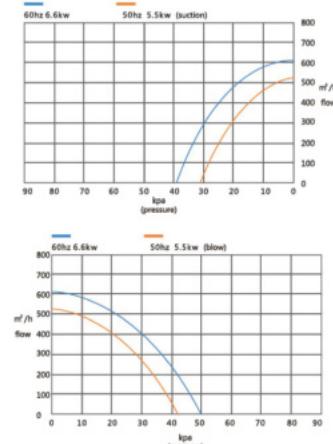


Type	Voltage V	Current A	Frequency Hz	Max Pressure KPa	Max flow m³/h	Max Vacuum KPa	Power kw	Rotational Speed r/min	Noise dB(A)	N.W. kg	G.W. kg	Packing Size (cm)
GB-2200S	△220 Y380	8.52(10.22) 4.92(9.91)	50(60)	36(43)	325(365)	28(33)	2.2(2.6)	2800(3400)	<70	29	31.5	42x42x42
GB-3000S	△220 Y380	11.07(13.29) 6.39(7.67)	50(60)	37(44)	390(430)	30(35)	3.0(3.6)	2800(3400)	<70	38	43.5	43x44x44

Type	Voltage V	Current A	Frequency Hz	Max Pressure KPa	Max flow m³/h	Max Vacuum KPa	Power kw	Rotational Speed r/min	Noise dB(A)	N.W. kg	G.W. kg	Packing Size (cm)
GB-4000S	△220 Y380	14.15(16.97) 8.17(9.8)	50(60)	38(45)	475(525)	28(33)	4.0(4.8)	2800(3400)	<70	47	54	46x46x50
GB-5500S	△220 Y380	19.23(23.21) 11.1(13.4)	50(60)	42(50)	530(616)	34(38)	5.5(6.6)	2800(3400)	<70	62	71	48x50x52

## GB-7500






GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

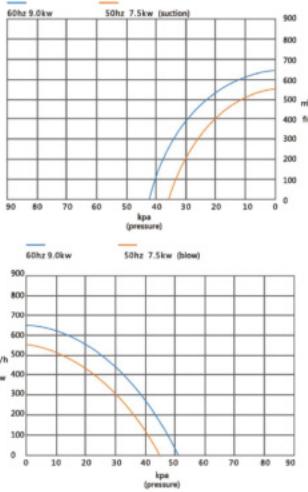

## GB-11000




GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

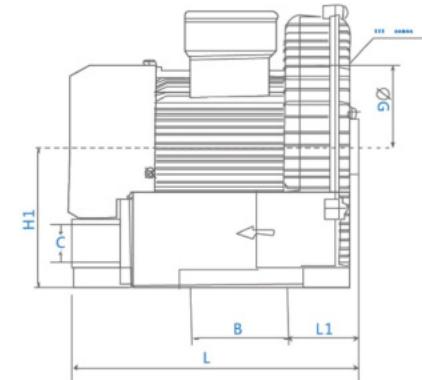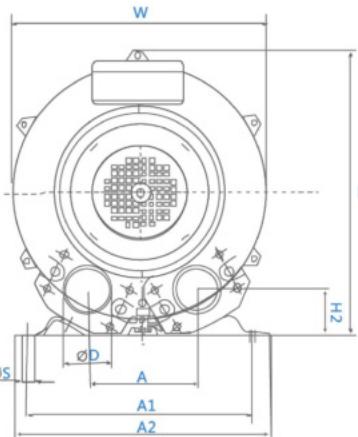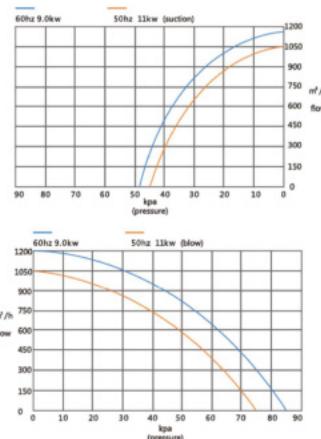

MODEL	SIZE	L	W	H	H1	H2	A	A1	A2	L1	B	G	D	S	C
GB-90		205	184	200	96	32	80	158	172	55	56	—	Φ20	Φ7	—
GB-120		205	184	200	96	32	80	157	172	55	56	—	Φ20	Φ7	—
GB-180		223	200	212	110	36	86	184	204	62	66	—	Φ20	Φ7	—
GB-200		223	200	212	110	36	86	184	204	62	66	—	Φ20	Φ7	—
GB-250		260	246	247	120	37	90	205	235	62	83	Φ140	Φ49	Φ8.5	M41
GB-370		260	246	247	130	38	90	205	235	62	83	Φ140	Φ49	Φ10	M41
GB-550		277	268	272	155	47	93	205	265	66	83	Φ162	Φ49	Φ12	M41
GB-750		300	286	302	165	58	111	225	265	80	95	Φ173	Φ50	Φ12	M47
GB-1100		325	335	340	190	61.5	115	270	300	30	140	Φ200	Φ60	Φ14	M60
GB-1500		325	335	340	190	61.5	115	270	300	30	140	Φ200	Φ60	Φ14	M60
GB-2200		377	382	385	192	56	125	290	326	103	140	Φ256	Φ60	Φ14	M60
GB-3000		402	408	410	210	56	140	313	345	103	140	Φ256	Φ60	Φ14	M60
GB-4000		435	418	470	237	110	143	315	330	113	185	Φ280	Φ76	Φ14	G2½
GB-5500		475	446	480	250	118	148	360	465	100	170	Φ288	Φ76	Φ15	G2½
GB-7500		475	446	480	250	118	148	360	465	100	170	Φ288	Φ76	Φ15	G2½
GB-11000		660	550	570	300	92	207	360	415	89	—	490	110	—	G4

Type	Voltage V	Current A	Frequency Hz	Max Pressure KPa	Max flow m³/h	Max Vacuum KPa	Power kw	Rotational Speed r/min	Noise dB(A)	N.W. kg	G.W. kg	Packing Size (cm)
GB-7500S	△220 Y380	25.98(34.19) 15(19.74)	50(60)	45(52)	550(640)	35(42)	7.5(9.0)	2800(3400)	<70	65	74	48×50×52
GB-11000S	Y380	28(38)	50(60)	75(85)	1050(1200)	40(52)	11(12.5)	2800(3400)	<70	120	135	69×58×61

## Exploded view


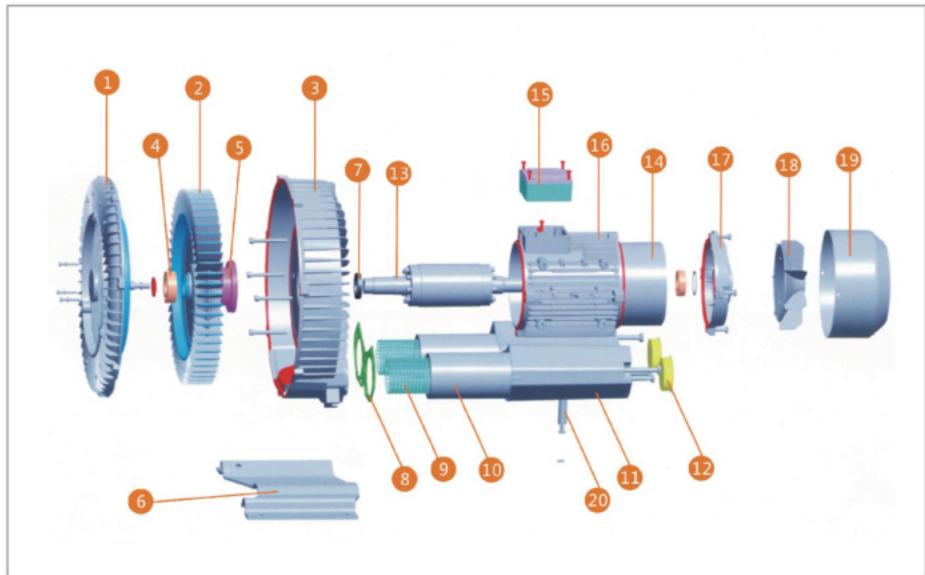


1、Pump cover	2、Impeller	3、Pump body	4、Bearing	5、Bearing cover
6、Seat	7、Oil seal	8、Gasket Shim	9、Silencer net	
10、Silencer sponge		11、Silencer tube	12、Joint(flange)	13、Rotor
14、Motor	15、Terminal box	16、Motor case		
17、Motor end cover	18、Fan	19、Fan cover	20、Supporting tube	

GB-550/2





GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

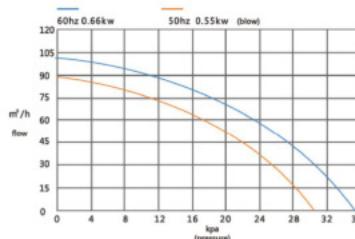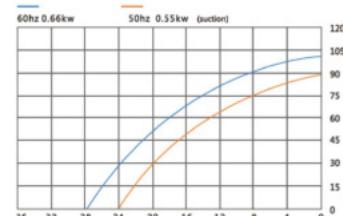

GB-750/2



GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

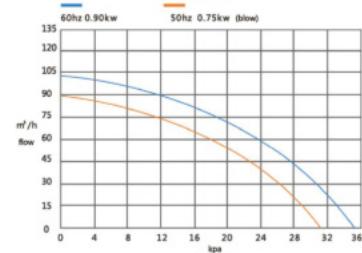
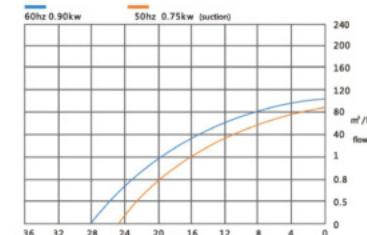


Type	Voltage	Current A	Frequency Hz	Max Pressure KPa	Max flow m³/h	Max Vacuum KPa	Power kw	Rotational Speed r/min	Noise dB(A)	N.W. kg	G.W. kg	Packing Size (cm)
GB-550/2	220	4.8(5.76)	50(60)	30(35)	88(100)	24(27)	0.55(0.66)	2800(3400)	<60	17.5	18.5	32×30×31
GB-550S/2	△220 Y380	2.51(3.01) 1.45(1.74)	50(60)	30(35)	88(100)	24(27)	0.55(0.66)	2800(3400)	<60	17.0	18.0	32×30×31
GB-750/2	220	6.3(7.56)	50(60)	31(35)	88(100)	25(28)	0.75(0.90)	2800(3400)	<60	19.0	20.0	45×36×34
GB-750S/2	△220 Y380	3.31(4.10) 1.81(2.37)	50(60)	31(35)	88(100)	25(28)	0.75(0.90)	2800(3400)	<60	18.0	21.5	45×36×34

## GB-1100S/2



GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

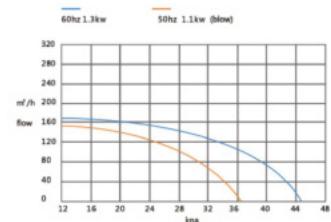
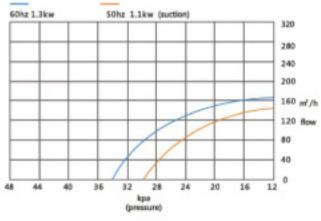


Type	Voltage V	Current A	Frequency Hz	Max Pressure KPa	Max flow m³/h	Max Vacuum KPa	Power kw	Rotational Speed r/min	Noise dB(A)	N.W. kg	G.W. kg	Packing Size (cm)
GB-1100/2	220	8.7(10.44)	50(60)	37(45)	145(170)	30(34)	1.1(1.3)	2800(3400)	<60	26	27	48x40x38
GB-1100S/2	△220 Y380	4.36(5.88) 2.52(3.42)	50(60)	37(45)	145(170)	30(34)	1.1(1.3)	2800(3400)	<60	24.5	25.5	48x40x38
GB-1500/2	220	11.8(14.16)	50(60)	38(47)	145(170)	31(35)	1.5(1.8)	2800(3400)	<60	27.2	28.2	48x40x38
GB-1500S/2	△220 Y380	5.96(8.20) 3.44(4.74)	50(60)	38(47)	145(170)	31(35)	1.5(1.8)	2800(3400)	<60	26	27	48x40x38

## GB-1500S/2





GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

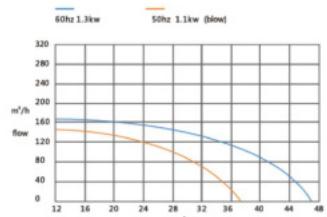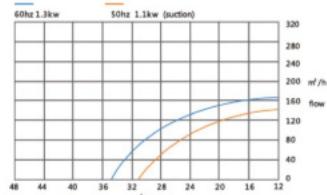

## GB-2200S/2





GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

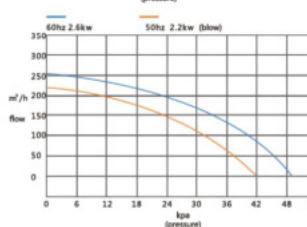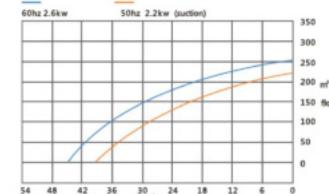

## GB-3000S/2



GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

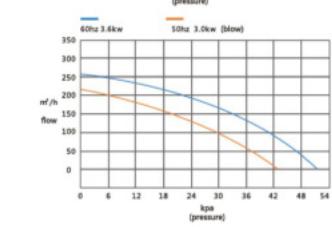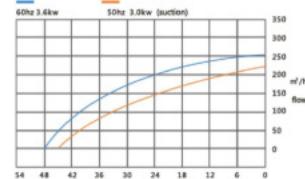


Type	Voltage V	Current A	Frequency Hz	Max Pressure KPa	Max flow m³/h	Max Vacuum KPa	Power kw	Rotational Speed r/min	Noise dB(A)	N.W. kg	G.W. kg	Packing Size (cm)
GB-2200S/2	△220 Y380	8.52(10.22) 4.92(5.91)	50(60)	42(49)	220(255)	39(44)	2.2(2.6)	2800(3400)	<70	37.8	43.3	50x43x42
GB-3000S/2	△220 Y380	11.07(13.29) 6.39(7.67)	50(60)	43(50)	220(255)	44(48)	3.0(3.6)	2800(3400)	<70	39	46.5	55x45x45

GB-4000S/2




GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

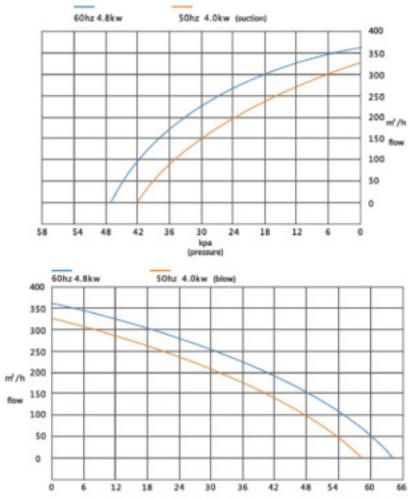

GB-5500S/2



GB series vortex air pump performance curve  
(for reference only, do not take it for testing standard)

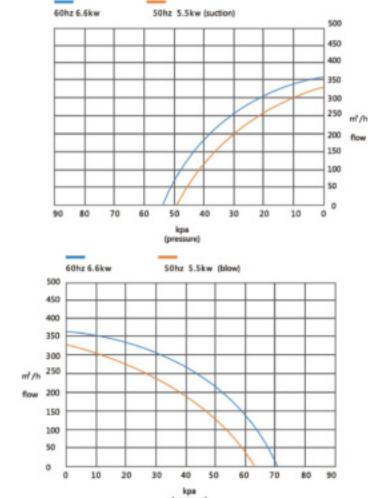

Blow,Dust collection,Exhaust,Cooling,Transport,Air lifting










### Application of Blow:



<b>The gas and heavy oil gush out firing</b>	<b>Wash the bottle machine and dries up</b>	<b>Can collect all the bits automatically after cut the Paper</b>	<b>It is dry to use the air knife</b>
vortex gas pump high-pressure air fuel  high wind pressure(2.0mmHg) and enough wind amount can lengthen your reliance to the air compressor horizontal.	vortex gas pump empty bottles  empty bottle of beverage are water-washed, suitable for the food industry.	vortex gas pump cloth piece blow and send off cut kniferoll and transfer  plastic, cloth, paper, etc. out.	vortex gas pump the circuit base plate of dust drop off water  electron industry can make use of forced draught blower to blowdown the small dust and water droplet.
<b>Air cushion</b>	<b>The domestic animal excrement ferments' fierceness gas</b>	<b>Subpoena transport</b>	<b>The electrolytic liquid mix round</b>
knife paper air ball  increasing the buoyancy, easy to move.	vortex gas pump saw-dust or rice husk discharging holes  entering domestic animal's excrement trough fortuitously with high-pressure air, it is exposed to the area to increase domestic animal's excretion. Also suitable for the sewage disposal of the public hazards.	examine cashier medicine office  it regards air as motive force to fast also teally to transport file.	vortex gas pump electrolytic trough  makes use of air to stir the electrolytic trough, make the electrolyte circulate and repeat adhering to the bubble and make electrolyte rapidly the result is even. export hoses with the best of 4mm.
<b>The oxygen supply in breed aquatics</b>	<b>Puncher machine</b>	<b>Powder body transport</b>	<b>Combustion-supporting discharge with the waste gas of the incinerator</b>
vortex gas pump oxygen  water in the pool	vortex gas pump molding product compress air  convenient to press product of taking shape after to take out.	powder body control valve spray head  powder body grains of body, etc. air of raw materials transport.	wind knife vortex gas pump  atmospherical help blaze and exhaust
<b>The exhaust gas blows smoking</b>	<b>Wash the car and dry up</b>	<b>Print and force dryness</b>	<b>Dry up after cleaning</b>
vortex gas pump wind knife  discharging rapidly by the scattered exhaust gas that appears, so as not to cause pollution.	vortex gas pump wind knife  blow the moisture content to dry after having car machine washing.	vortex gas pump heater wind knife  enabling the printing color to dry fast.	vortex gas pump wind knife  moisture content or oil gas after cleaning break away from articles rapidly

Type	Voltage V	Current A	Frequency Hz	Max Pressure KPa	Max flow m/h	Max Vacuum KPa	Power kw	Rotational Speed r/min	Noise dB(A)	N.W. kg	G.W. kg	Packing Size (cm)
GB-4000S/2	△220 Y380	1415(16.97) 8.17(9.8)	50(60)	57(64)	325(360)	42(47)	4.0(4.8)	2800(3400)	<70	55	65	55×51×42
GB-5500S/2	△220 Y380	19.23(23.21) 11.1(13.4)	50(60)	63(71)	325(360)	48(54)	5.5(6.6)	2800(3400)	<70	85	98	67×50×50

## Blow,Dust collection,Exhaust,Cooling,Transport,Air lifting

### Application of Suction:

<b>The sucking of the printing machine of network edition</b>	<b>Eject the exhaust gas and dust produced while welding drawing</b>	<b>The weave cotton machine suck silk</b>	<b>Photo-engraving</b>
 <p>printed matter utilize the pressure of sucking to be regular, in order to make it easy for print</p>	 <p>acum way is arranged to the elsewhere.ensure operators to be healthy.</p>	 <p>absorb the moisture content and regular end of a thread.Improve the quality and efficiency of the products.</p>	 <p>make use of vacuum suction to keep films,make it smooth,is suitable for photo-engraving industry.</p>
<b>The powder body transports</b>	<b>Print suck</b>	<b>Industry hoover</b>	<b>Vacuum dehydrate</b>
 <p>granular object,for instance plastic raw materials,etc,can make use of the atmospheric pressure,blow or the vacuum suction to accomplish the task of sending.</p>	 <p>vacuum suck printing paper is it transfer by molding</p>	 <p>in the factory for bits platform of remaining etc,it is the all right it have Fig.it have the clean the ways</p>	 <p>the paper pulp dehydrates,pollution dehydrates,the cloth dehydrates etc.</p>
<b>Make books machine</b>	<b>Incomplete cloth deal with</b>	<b>Ox milk paper carton filling machine</b>	<b>Bean curd machinery</b>
 <p>cut off when keep sucking.</p>	 <p>cloth cutting treatment.</p>	 <p>ox milk vacuum that box is fill attract and utilize.</p>	 <p>attracting the soybean while to give, clean and use to cleaning the trough.</p>
<b>keeping processing</b>	<b>Defence works scene</b>	<b>Iron cloth machine</b>	<b>The gas resolves</b>
 <p>block of processing thing, plastic,etc, using regularly for some un-magnetism object's fixing</p>	 <p>for remove the part of the tunnel and narrow and small part's dust and poisonous gas.</p>	 <p>spend to discharge the vapour when ironning cloth.</p>	 <p>using the attraction of the gas resolves device.</p>

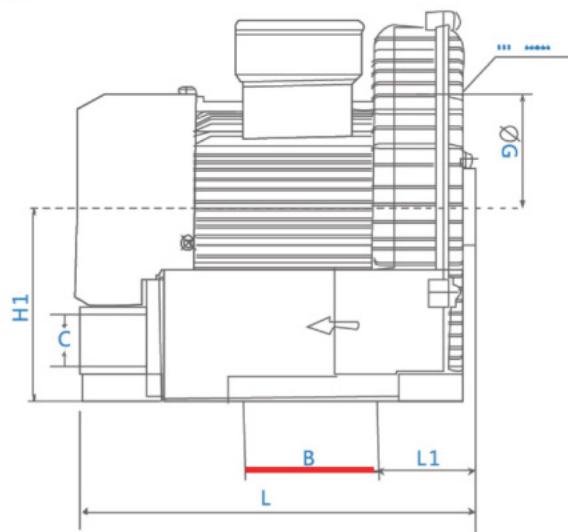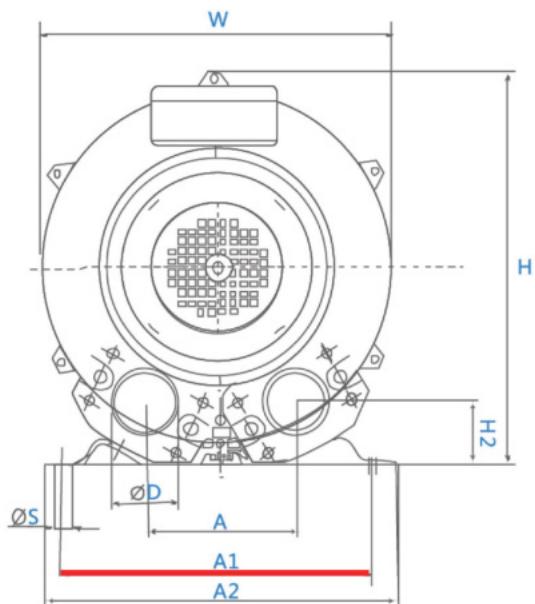

MODEL \ SIZE	L	W	H	H1	H2	A	A1	A2	L1	B	G	D	S	C
GB-90	205	184	200	96	32	80	158	172	55	56	—	Φ20	Φ7	—
GB-120	205	184	200	96	32	80	157	172	55	56	—	Φ20	Φ7	—
GB-180	223	200	212	110	36	86	184	204	62	66	—	Φ20	Φ7	—
GB-200	223	200	212	110	36	86	184	204	62	66	—	Φ20	Φ7	—
GB-250	260	246	247	120	37	90	205	235	62	83	Φ140	Φ49	Φ8.5	M41
GB-370	260	246	247	130	38	90	205	235	62	83	Φ140	Φ49	Φ10	M41
GB-550	277	268	272	155	47	93	205	265	66	83	Φ162	Φ49	Φ12	M41
GB-750	300	286	302	165	58	111	225	265	80	95	Φ173	Φ50	Φ12	M47
GB-1100	325	335	340	190	61.5	115	270	300	30	140	Φ200	Φ60	Φ14	M60
GB-1500	325	335	340	190	61.5	115	270	300	30	140	Φ200	Φ60	Φ14	M60
GB-2200	377	382	385	192	56	125	290	326	103	140	Φ256	Φ60	Φ14	M60
GB-3000	402	408	410	210	56	140	313	345	103	140	Φ256	Φ60	Φ14	M60
GB-4000	435	418	470	237	110	143	315	330	113	185	Φ280	Φ76	Φ14	G2½
GB-5500	475	446	480	250	118	148	360	465	100	170	Φ288	Φ76	Φ15	G2½
GB-7500	475	446	480	250	118	148	360	465	100	170	Φ288	Φ76	Φ15	G2½
GB-11000	660	550	570	300	92	207	360	415	89	—	490	110	—	G4